

# EL<sup>®</sup>MARK


The Brand of Electricity

## FOUR CHANNEL FOUR ZONES REMOTE



# SMART HOME

4 Zone Keys , Separately Control for 4 Areas

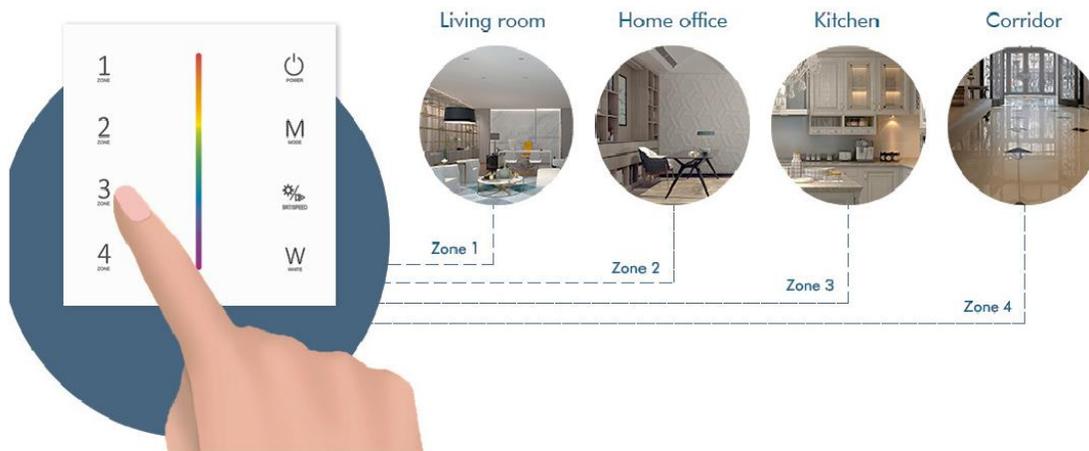


## Specifications:

- Output signal: RF(2.4G)
- Battery capacity: 2xAAA
- Working current: <20mA
- Standby current: < 20μA
- Remote distance: 30m
- Working temperature: -30°C~55°C
- IP rating: IP20

## Features:

- To control one-four colors
- Removeable and stick anywhere easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control
- Free installation, no wiring, removable.

## Dimensions:

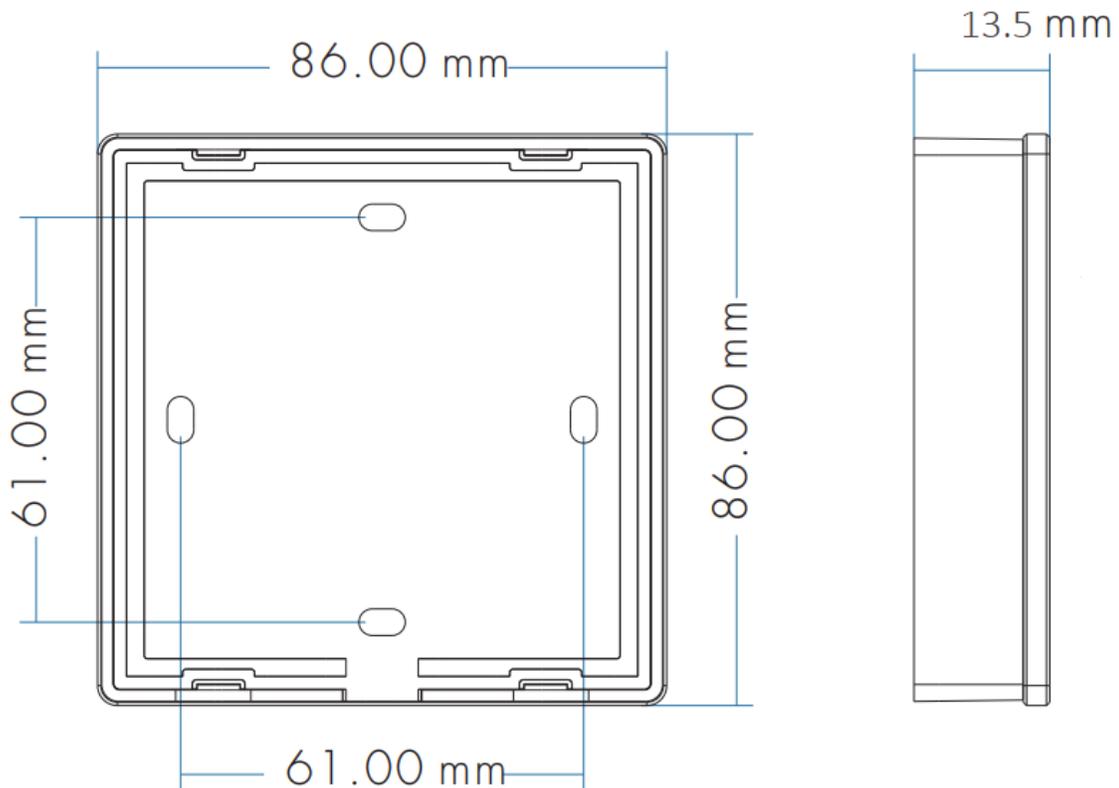

## Match Remote Control:

### Use the controller's Match key

**Match:** Short press match key immediately press Zone key of the touch panel.

**Delete:** Switch off the power of the receiver, then switch on power again, immediately short press Zone key 5 times on the touch panel. The light blinks 5 times means all matched remotes were deleted.

### Use Power Restart


**Match:** Switch off the power of the receiver, then switch on power again, immediately short press Zone key 3 times on the touch panel. The light blinks 3 times means match is successful.

**Delete:** Press and hold match key for 5s to delete all match, the light blinks 5 times means all matched remotes were deleted.

## Basic data:

Catalogue number	Output signal	Battery capacity	Working current	Standby current	Packing /Box (pcs)
99TOUCHB4	RF(2.4G)	2xAAA	<20mA	< 20μA	1/200

## Key functions:

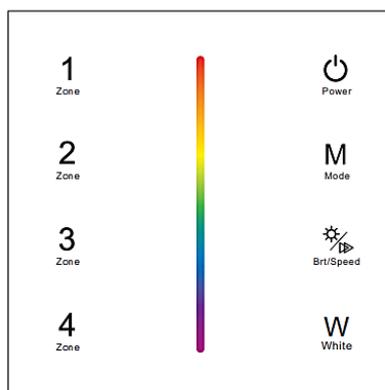

— Turn on/off all zone light.



— Color slide.



— Short press play 10 built-in mode, long press run mode-cycle.



— Adjust dynamic mode speed or static color brightness, 10 levels.



— Short press turn on/off W channel, long press adjust W channel brightness.



Zone



Zone



Zone



Zone

Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light. 4 zone control separately or synchronously, each zone could control multiple receivers.

## Safety and EMC:

EMC standard (EMC): EN 301 489, EN 62479

Radio Equipment (RED): EN 300 328

Safety standard (LVD) EN 60950